


Lean CarryMore® E-frame System







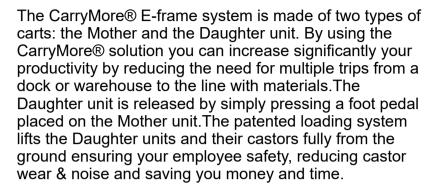



Designed for following uses and industries:











Key benefits

- Eliminate the need for forklifts and reduce the risk of accidents in manufacturing and assembly lines
- ✓ Lower maintenance costs
- Reduce overall operator costs
- Require only one operator making multiple deliveries on one route trip
- ✓ Enable to carry smaller and kitted loads in the same trains
- ✓ Faster delivery rates takes seconds to unload

Technical specifications

CarryMore® Mother Unit 1000

Platform size	1200 x 800 mm
External dimensions	2549 x 1091 x 380 mm
Tare weight	200 kg
Steering system	Center-steer: 2 fixed center and spring loaded swivel wheels at front and back
Wheels	High payload polyurethane wheels
Working load capacity at 8 km/h	1000 kg
Working load capacity at 11 km/h	1000 kg
Working load capacity at 16 km/h	850 kg
Surface treatment	Powder coating
Train configuration	Up to 5-6 units per Mother Unit

CarryMore® Daughter Unit

Platform size	1200 x 800 mm
External dimensions	1240 x 985 x 302 mm
Height with the handle	1020 mm
Tare weight	46-60 kg
Wheel type	2 fixed & 2 swivel
Wheel material	Polyurethane
Surface treatment	Powder coating
CarryMore® Mother unit 1000 is designed to hold	 ✓ One Daughter Unit 1200 x 800 mm ✓ Customized carts measuring up to 1625 x 1270 mm